



User Manual

Wallee Payment Provider Plugin for Odoo v17.0

Table of Contents

1. Introduction.....	3
2. Features	3
3. Installation	4
4. Working of the Plugin.....	5
4.1. Odoo Backend Configuration for Wallee.....	5
4.2. Payment Processing from Website	9
4.3. Order Status	10
4.4. Wallee Multi-Website for Multi-Space Backend Configuration.....	11
4.5. Invoice Payment Process	14
5. Technical Requirements / Compatible With:	19
6. Changes Log / Release Notes	19
7. Support.....	20

1. Introduction

The Wallee payment provider extension from PIT Solutions acts as a bridge between Wallee and the Odoo Web Shop, offering a standardized solution for accepting payments through a wide range of global payment providers.

Key Characteristics include:

- **Unified Payment Gateway:** This extension centralizes payments through a single gateway, enabling transactions with numerous providers including Credit/Debit Card, PostFinance E-Finance, PostFinance Card, TWINT.
- **Comprehensive Payment Processing:** Wallee goes beyond basic payment processing by providing additional features such as reconciliation services.
- **Broad Payment Network:** It connects Odoo Shop users to a payment hub that integrates with over 50 payment gateways and processors, ensuring a broad array of payment options.
- **Efficient Integration:** Utilizing REST APIs, the connector helps reduce cart abandonment by providing customers with their preferred payment methods and lowers costs through optimized payment routing.

This extension significantly enhances the payment experience for Odoo Shop users, offering flexibility and cost-effectiveness while offering a wide variety of payment options.

2. Features

- **Easy to Install:** Quick and straightforward installation process.
- **Flexible:** Adapts to various business needs and payment requirements.
- **User-Friendly:** Intuitive interface and configurable settings to match individual preferences.
- **Unified Payment Gateway:** Centralized payment processing through a single gateway.
- **Multiple Payment Methods:** Supports a wide range of payment options including Credit/Debit Card, PostFinance E-Finance, PostFinance Card, TWINT.
- **Transaction Management:** Efficiently handles and maintains transaction records.

- **Customizable Notifications:** Allows for tailored system notifications.
- **Multi-Website and Multi-Space Support:** Configurable for multiple websites and spaces.

3. Installation

Follow the steps below to install the **Wallee Payment Acquirer** plugin in your Odoo application:

1. Install Required Dependencies

- Navigate to the requirements.txt file located in the plugin directory.
- Install all the listed Python dependency packages on the target server using the following command:

```
pip install -r requirements.txt
```

- Ensure that all dependencies are installed successfully before proceeding to the next step.

2. Access the Odoo Application

- Log in to your Odoo instance with administrative access.
- Navigate to the **Apps** menu from the main dashboard.

3. Install the Wallee Payment Acquirer Plugin

- In the Apps search bar, type “Wallee Payment Acquirer.”
- From the search results, locate the plugin and click the Install button.
- Wait for the installation process to complete successfully.

4. Post-Installation Check (Optional)

- Once installed, ensure that the module appears in your list of installed apps.

Verify that the plugin is accessible under the **Payment Acquirers** section in the **Invoicing** or **Website** settings, depending on your Odoo configuration.

4. Working of the Plugin

The Wallee back-end offers flexible configuration options to tailor the payment experience:

Payment Method Management: Admins can define which payment methods are available to users, customizing the payment options as needed.

Payment Completion Process: Admins have the choice to redirect users to the payment service provider's site for transaction completion or handle payments within the shop site using an I-frame. The method of handling payments (redirection, I-frame, or both) depends on the capabilities of the payment service provider.

Enhanced Security with 3D Secure: Admins can enable 3D Secure functionality to add an extra layer of security during the checkout process. When enabled, users will be directed to the 3D Secure service of the payment method to handle their payment details securely.

Customizable Notifications: Admins can adjust notification contents for various payment statuses such as pending, completed, or canceled. Additionally, system notifications like help messages and order completion thank-you messages can be customized.

Editable Documents: Order emails, invoices, reminders, packing slips, and other related documents can be modified to fit specific formats and requirements.


These features ensure a flexible, secure, and tailored payment experience for both administrators and users.

4.1. Odoo Backend Configuration for Wallee

You can access the payment providers through the following menu options:


- *Invoicing > Configuration > Payment Providers*
- *Website > Configuration > eCommerce > Payment Providers*

These paths will direct you to the configuration settings for managing payment providers.

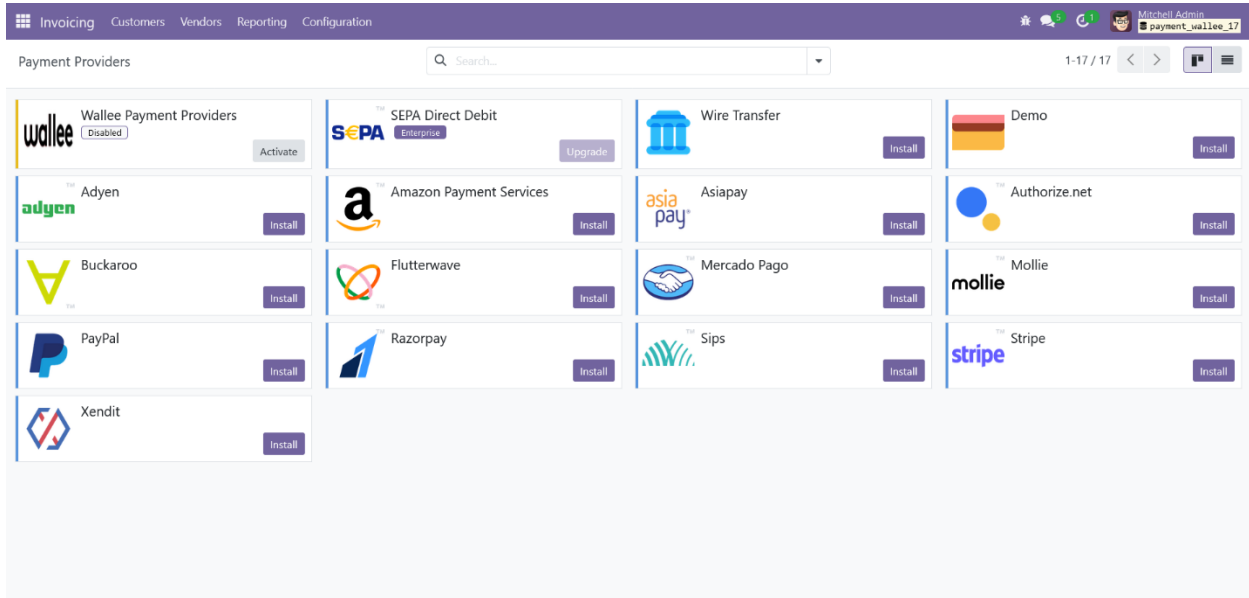

Screenshot 1: Payment Providers Listed in Odoo Backend

After selecting the Wallee Payment Provider from the list, navigate to the *Credentials* tab. In this section, you can enter the credentials for your Wallee Payment Provider space.

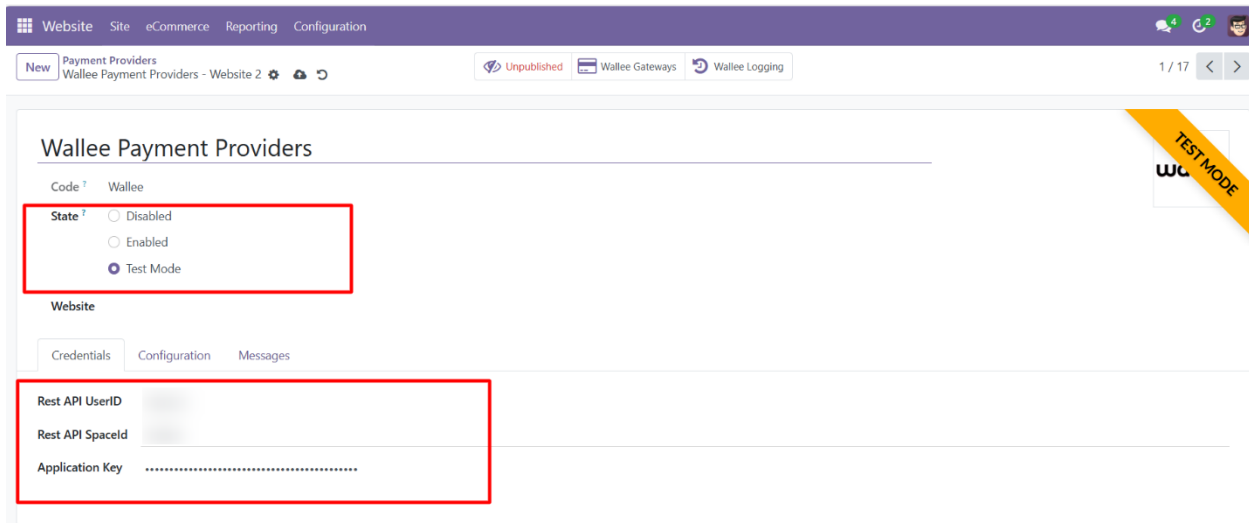


Screenshot 2: Odoo Backend Configuration of Wallee Credentials

To configure the Wallee Payment Provider in Odoo, you will need the following details from Wallee:

1. **Rest API UserID:** The Application User ID created in app.wallee.com.
2. **Rest API SpaceID:** The Space ID obtained from app.wallee.com.
3. **Application Key:** The Application Key generated in app.wallee.com.

After entering these details, you can set the status to '**Enabled**' for live transactions or '**Test Mode**' for testing purposes.

Additionally, you can customize the payment form and payment follow-up settings within the **Configuration** tab to tailor the payment experience to your needs.

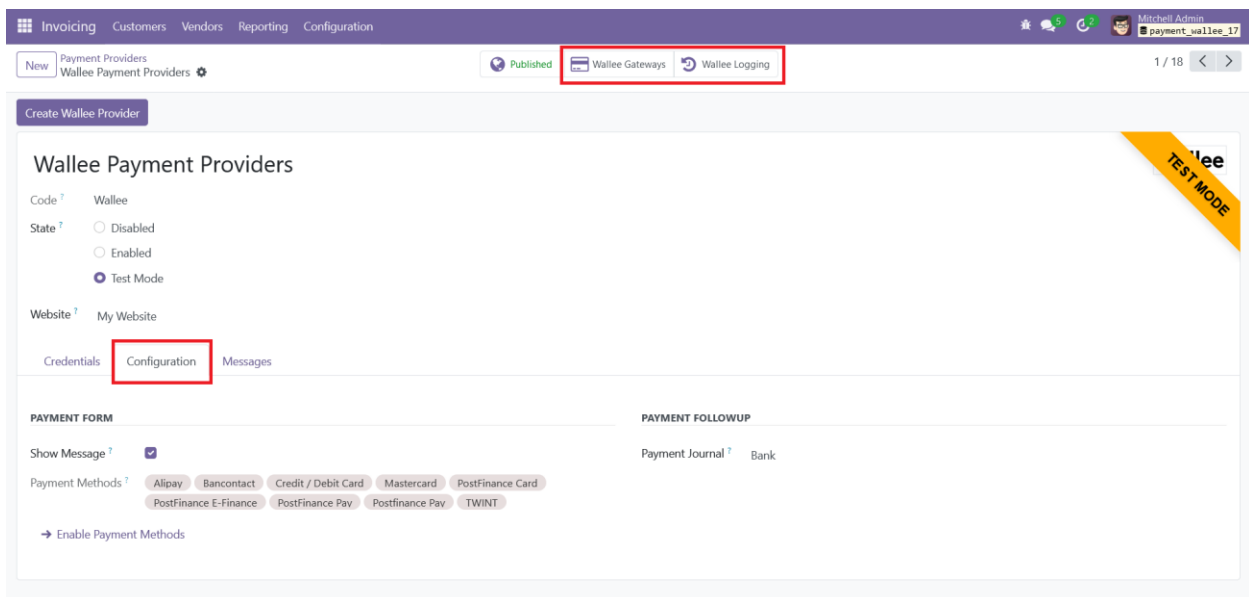

Screenshot 3: Odoo Backend Configuration

After successful configuration, you can view the payment methods and logs related to the Wallee Payment Provider as follows:

- **Payment Methods:** Click on the '**Wallee Gateways**' button to view and manage the available payment methods.
- **Logs:** Click on the '**Wallee Logging**' button to access and review logs related to the Wallee payment provider.



The screenshot shows the Odoo Invoicing menu with sub-items: Customers, Vendors, Reporting, and Configuration. The breadcrumb trail is: Payment Providers / Wallee Payment Providers. The page title is "Wallee Payment Gateways". A search bar is present. The table below lists various payment methods with columns for Name, Payment Meth..., Transaction Interfa..., oneClick Payme..., and Image Url.

<input type="checkbox"/>	Name	Payment Meth...	Transaction Interfa...	oneClick Payme...	Image Url
<input type="checkbox"/>	Credit / Debit Card	1,457,546,097,597	ONSITE	<input type="checkbox"/>	https://app-wallee.com/en-US/s/64211/resource/web/image/payment/method/credit-debit-card.svg?strategy=snapshot&snapshot=293861
<input type="checkbox"/>	TWINT	1,457,546,097,639	OFFSITE	<input type="checkbox"/>	https://app-wallee.com/en-US/s/64211/resource/web/image/payment/method/twint.svg?strategy=snapshot&snapshot=293861
<input type="checkbox"/>	PostFinance Card	1,457,546,097,597	OFFSITE	<input type="checkbox"/>	https://app-wallee.com/en-US/s/64211/resource/web/image/payment/card-brand/postfinance-card.svg?strategy=snapshot&snapshot=293861
<input type="checkbox"/>	PostFinance Pay	1,689,233,132,073	OFFSITE	<input type="checkbox"/>	https://app-wallee.com/en-US/s/64211/resource/web/image/payment/method/pf_pay.svg?strategy=snapshot&snapshot=293861
<input type="checkbox"/>	PostFinance E-Finance	1,460,954,915,005	OFFSITE	<input type="checkbox"/>	https://app-wallee.com/en-US/s/64211/resource/web/image/payment/online-banking/postfinance-e-finance.svg?strategy=snapshot&snaps...
<input type="checkbox"/>	Postfinance Pay	1,689,233,132,073	OFFSITE	<input type="checkbox"/>	https://app-wallee.com/en-US/s/64211/resource/web/image/payment/method/pf_pay.svg?strategy=snapshot&snapshot=293861
<input type="checkbox"/>	Bancontact	1,521,548,803,555	OFFSITE	<input type="checkbox"/>	https://app-wallee.com/en-US/s/64211/resource/web/image/payment/method/bancontact.svg?strategy=snapshot&snapshot=293861
<input type="checkbox"/>	Mastercard	1,543,209,984,299	ONSITE	<input type="checkbox"/>	https://app-wallee.com/en-US/s/64211/resource/web/image/payment/method/intelligent-credit-card.svg?strategy=snapshot&snapshot=293...
<input type="checkbox"/>	Alipay	1,457,546,097,615	OFFSITE	<input type="checkbox"/>	https://app-wallee.com/en-US/s/64211/resource/web/image/payment/method/alipay.svg?strategy=snapshot&snapshot=293861

Screenshot 4: Wallee Payment Methods


The screenshot shows the Odoo Invoicing menu with sub-items: Customers, Vendors, Reporting, and Configuration. The breadcrumb trail is: Wallee Payment Provider Logs. A search bar is present. The table below lists logs with columns for Created on, Description, and Status Code.

<input type="checkbox"/>	Created on	Description	Status Code
<input type="checkbox"/>	02/11/2025 11:31:26	Successfully executed Wallee Services	200
<input type="checkbox"/>	02/11/2025 08:31:29	Successfully executed Wallee Services	200
<input type="checkbox"/>	02/11/2025 05:39:21	Successfully executed Wallee Services	200
<input type="checkbox"/>	02/11/2025 02:31:25	Successfully executed Wallee Services	200
<input type="checkbox"/>	02/10/2025 23:31:56	Successfully executed Wallee Services	200
<input type="checkbox"/>	02/10/2025 20:32:22	Successfully executed Wallee Services	200
<input type="checkbox"/>	02/10/2025 19:07:59	Successfully executed Wallee Services	200
<input type="checkbox"/>	02/10/2025 19:07:57	Successfully executed Wallee Services	200
<input type="checkbox"/>	02/10/2025 17:31:38	Successfully executed Wallee Services	200
<input type="checkbox"/>	02/10/2025 14:33:24	Successfully executed Wallee Services	200
<input type="checkbox"/>	02/10/2025 11:32:00	Successfully executed Wallee Services	200
<input type="checkbox"/>	02/10/2025 11:01:38	Successfully executed Wallee Services	200
<input type="checkbox"/>	02/10/2025 11:01:36	Successfully executed Wallee Services	200
<input type="checkbox"/>	02/10/2025 11:00:25	Successfully executed Wallee Services	200
<input type="checkbox"/>	02/10/2025 10:59:53	Successfully executed Wallee Services	200


Screenshot 5: Wallee Payment Provider Logs

4.2. Payment Processing from Website

Choose your preferred payment method from those listed on the payment screen based on your currency. Then, click the 'Pay Now' button on the Odoo eCommerce payment screen to proceed to the Wallee payment interface and complete your payment.

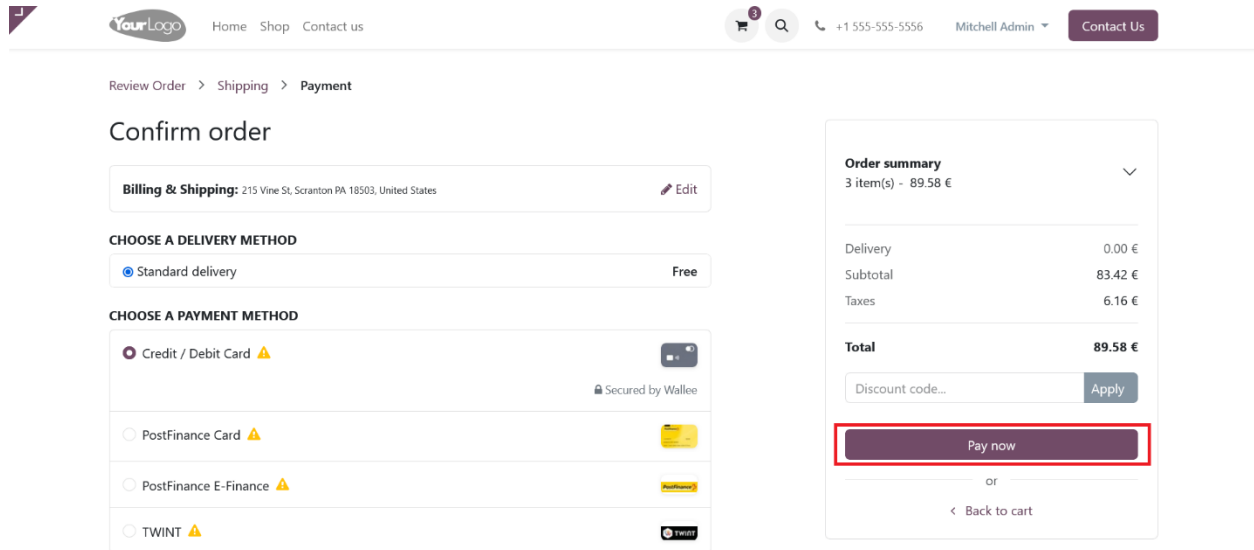

Screenshot 6: Multiple Payment Methods Listed in the Payment Screen

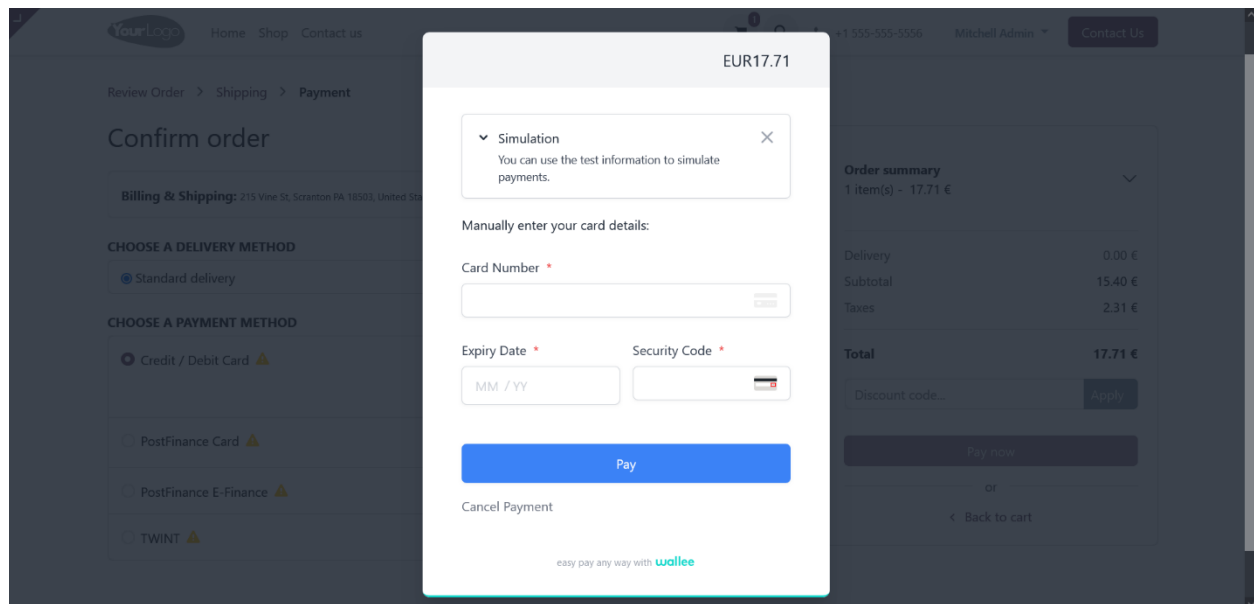

Screenshot 7: Wallee Payment Interface (Lightbox)

On this screen, enter your card details and click the '**Confirm**' button. You will then be redirected to the payment status page on the Odoo eCommerce website.

4.3. Order Status

The screenshot shows the 'Order Confirmation' page in Odoo. The header includes the 'YourLogo' and navigation links for 'Home', 'Shop', and 'Contact us'. A shopping cart icon with a '1' notification, a search icon, a phone number '+1 555-555-5556', and a user profile 'Mitchell Admin' with a 'Contact Us' button are also visible.

The main content area features a 'Thank you for your order.' message with a 'Print' button and the order ID 'Order S00038'. Below this is the 'Payment Information' section, which shows 'Wallee Payment Providers' with a total of '89.58 €'. A green message box states 'Your payment has been successfully processed.' The 'Billing & Shipping' address is '215 Vine St, Scranton PA 18503, United States'.

On the right, an 'Order summary' table shows '3 item(s) - 89.58 €' with a dropdown arrow. The summary table includes:

Delivery	0.00 €
Subtotal	83.42 €
Taxes	6.16 €
Total	89.58 €

The footer contains 'Useful Links' (Home, About us, Products, Services, Legal, Contact us), 'About us' text, and 'Connect with us' social media icons (Facebook, Twitter, LinkedIn, Instagram).

Screenshot 8: Order Confirmation

The screenshot shows the 'Order Cancelled' page in Odoo. The header is identical to the previous screenshot.

The main content area features a 'Payment Information' section with 'Wallee Payment Providers' and a total of '17.71 €'. A red message box states 'Your payment has been cancelled.' The 'Billing & Shipping' address remains '215 Vine St, Scranton PA 18503, United States'.

On the right, an 'Order summary' table shows '1 item(s) - 17.71 €' with a dropdown arrow. The summary table includes:


Delivery	0.00 €
Subtotal	15.40 €
Taxes	2.31 €
Total	17.71 €

The footer is identical to the previous screenshot.

Screenshot 9: Order Cancelled


4.4. Wallee Multi-Website for Multi-Space Backend Configuration

For multi-website configuration, you need to create separate Wallee payment providers for each website. To do this, use the **“Create Wallee Provider”** button to set up individual payment providers for each site.

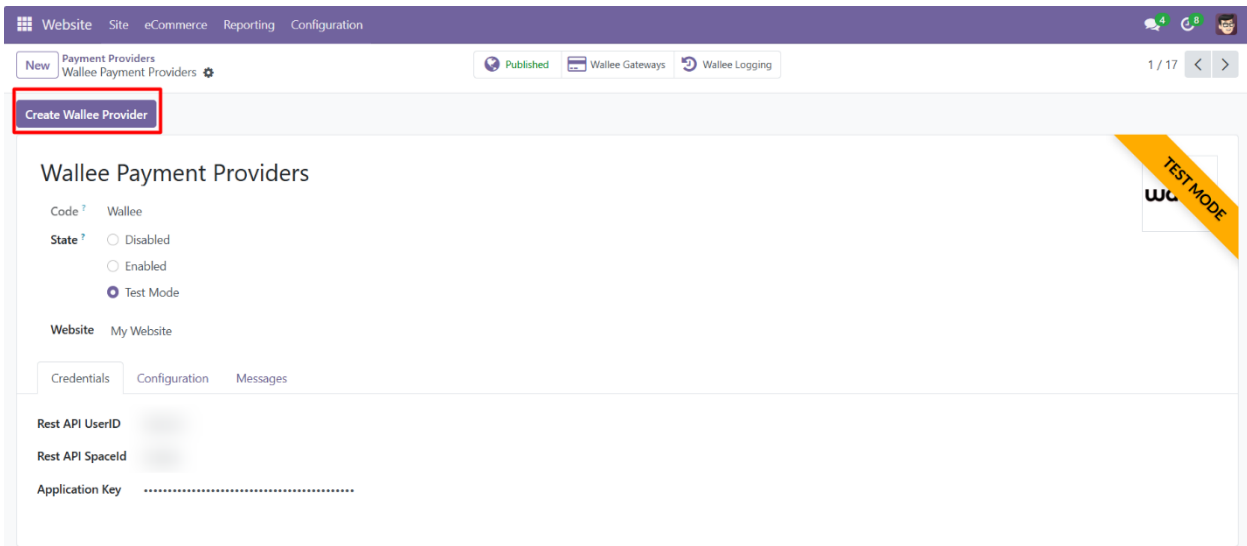


Screenshot 10: Creating new Wallee Provider

Clicking the **“Create Wallee Provider”** button will create a new Wallee Provider in Odoo with a unique name. Next, you’ll need to associate this provider with the desired website and input the credentials for the Wallee space that isn’t already configured in Odoo.

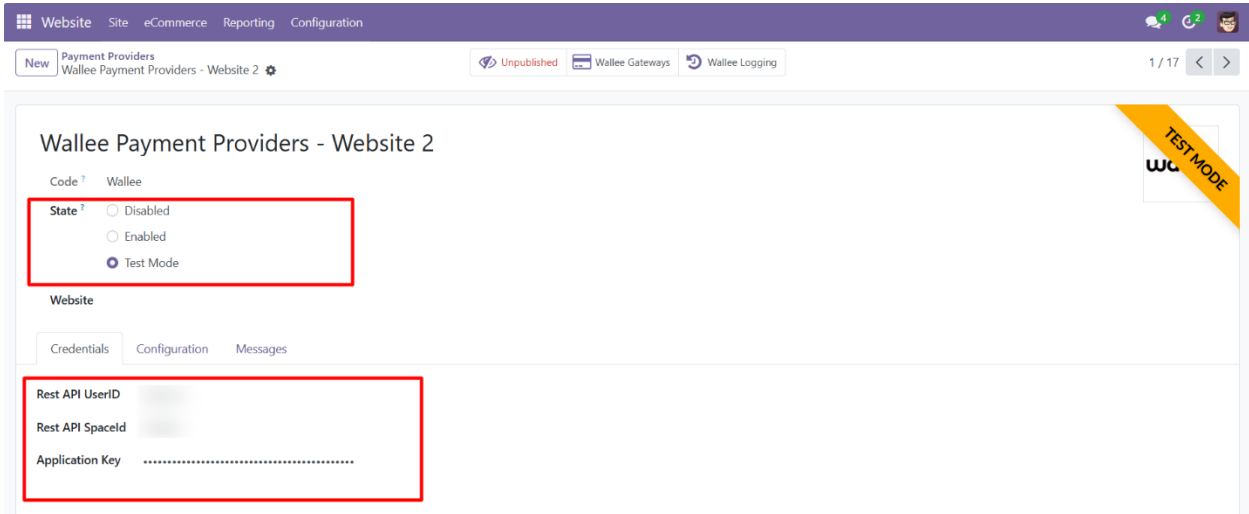


Screenshot 11: Mapping Website to Wallee Provider

If you attempt to save the Wallee provider without associating it with a website, or if you try to map it to a website that's already assigned, the system will prevent this action and display error messages, as shown in the screenshots below.

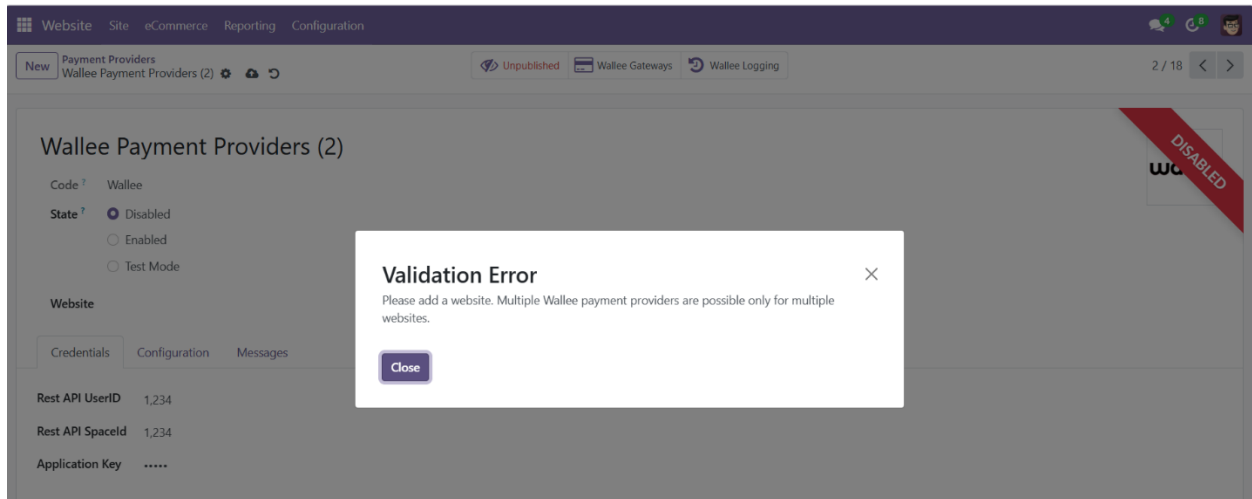


Screenshot 12: Message Displayed without Mapping to a Website.

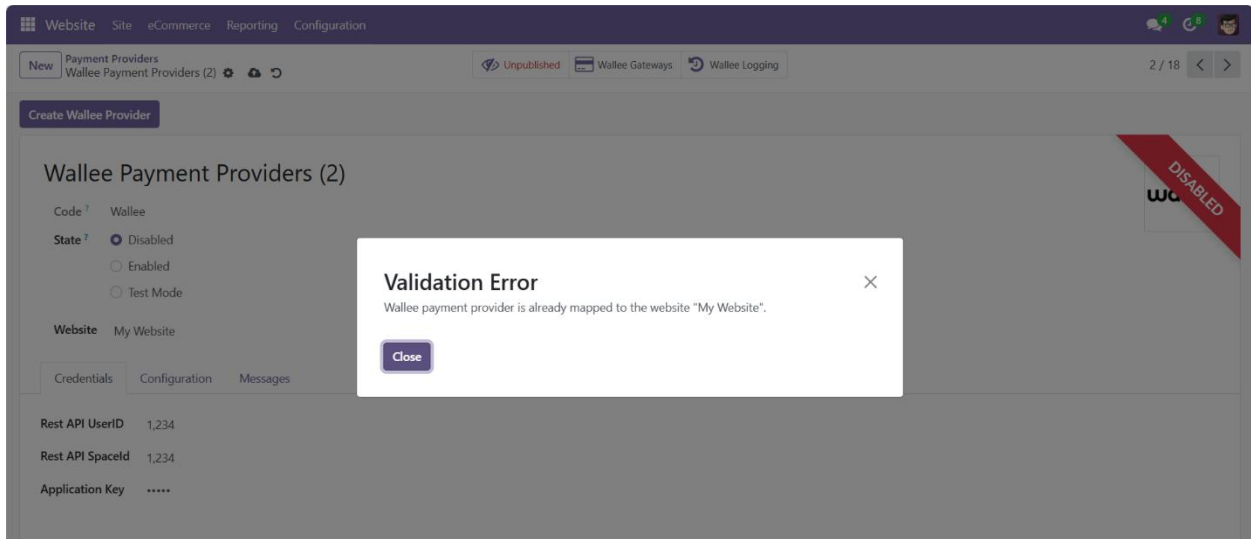


Screenshot 13: Message Displayed the Website is already Mapped to a Wallee Provider.

To enable multi-website functionality, you must configure the domain names for each website.

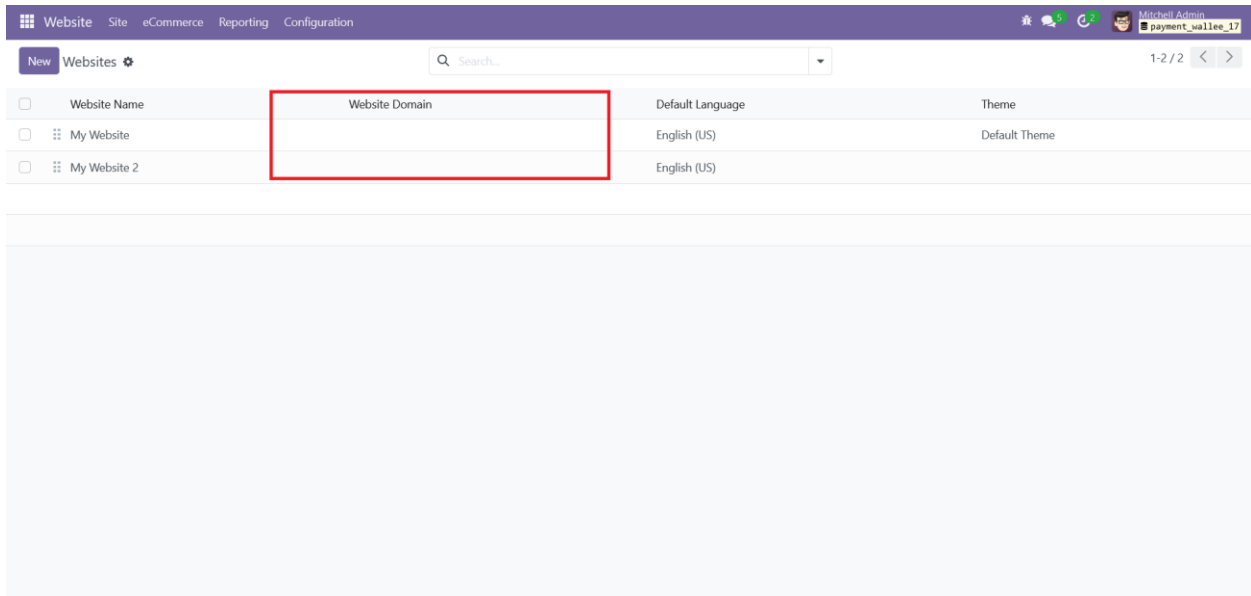


Screenshot 14: Mapping Domain to Websites.

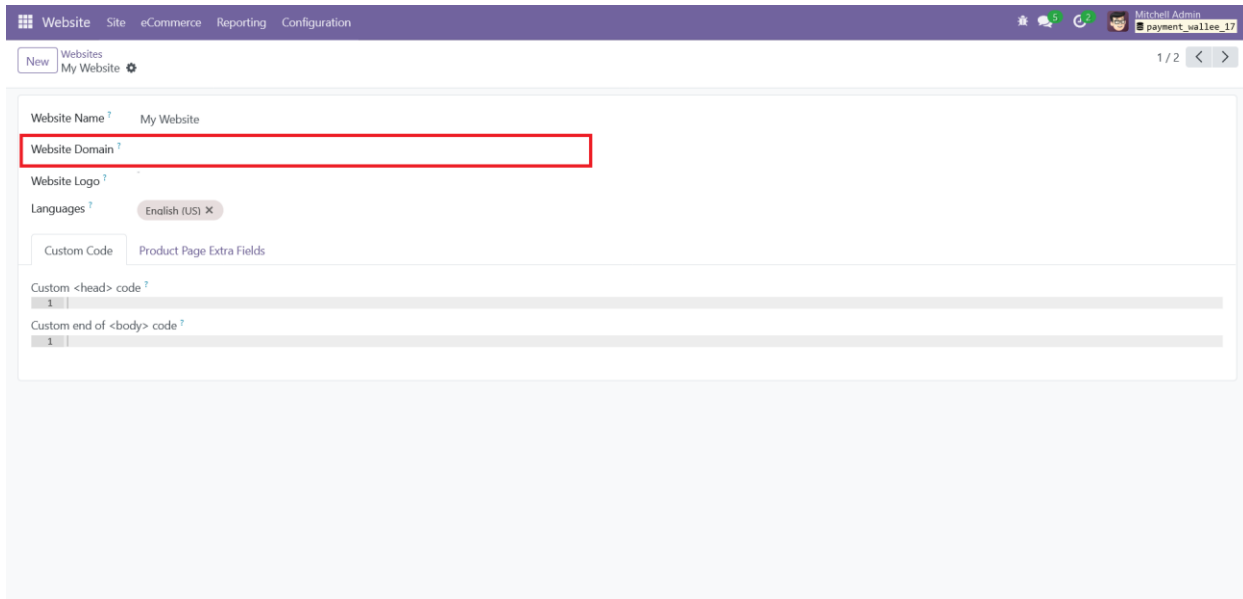

Screenshot 15: Mapping Domain to Websites


4.5. Invoice Payment Process

By clicking on the **My Account** menu, users can view documents such as invoices and sales orders associated with their account.

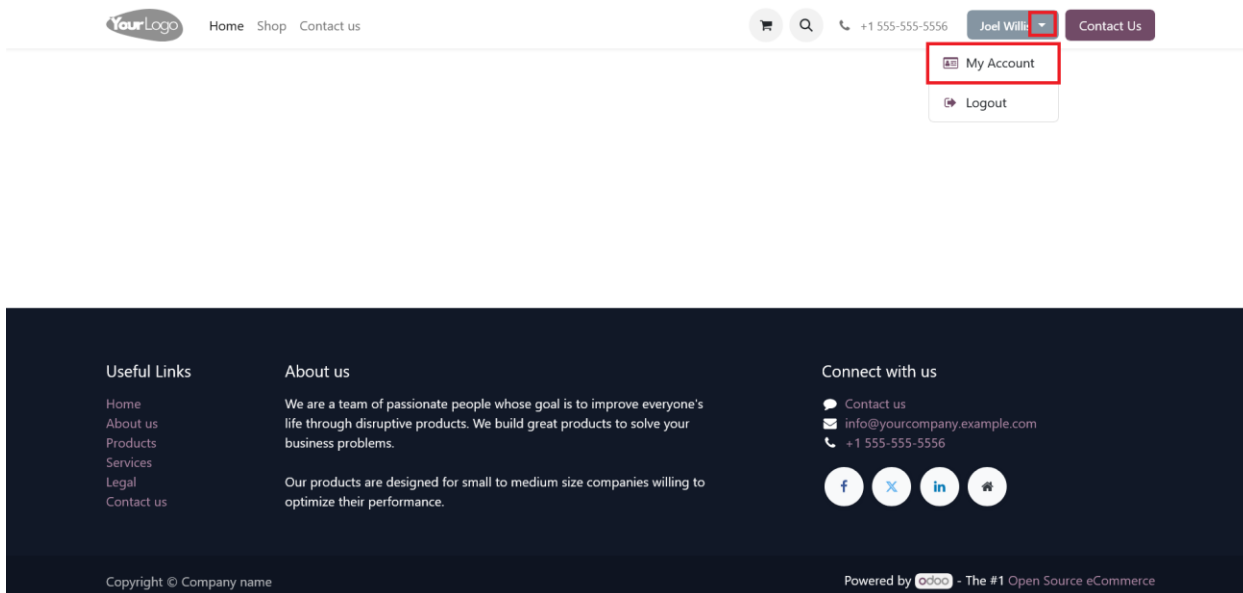


Screenshot 16: Portal User Dashboard

By clicking the **Invoices** menu, users can view all their invoices.

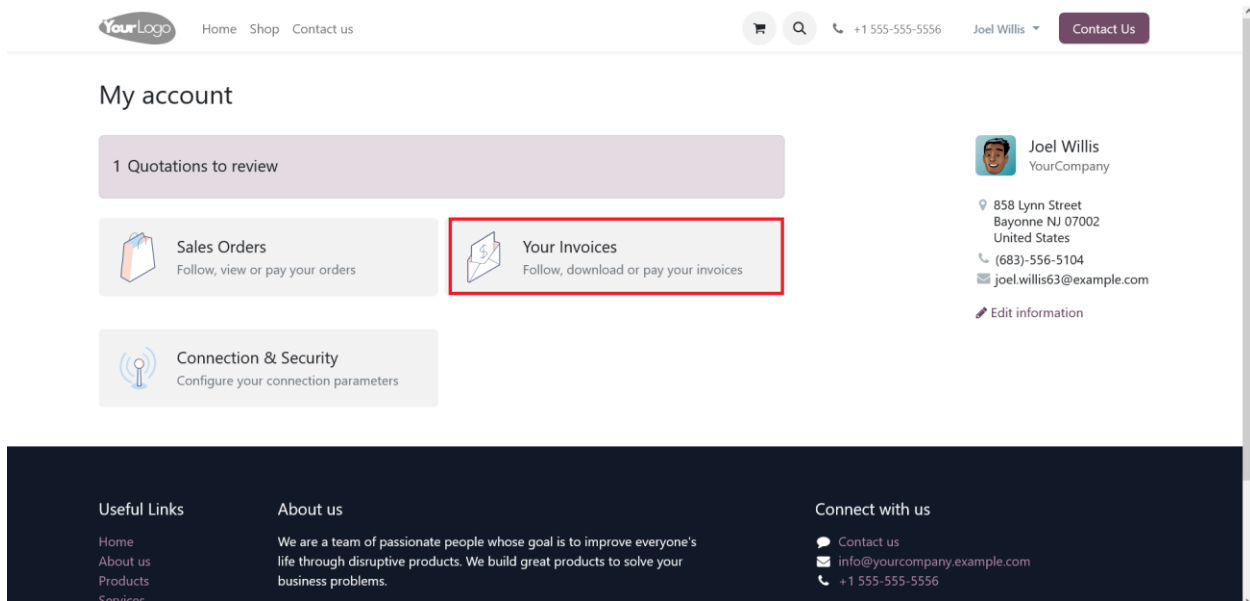


Screenshot 17: Portal User Account Dashboard

Here, users can view all their invoices. From this list, they can select an invoice to proceed with the payment.

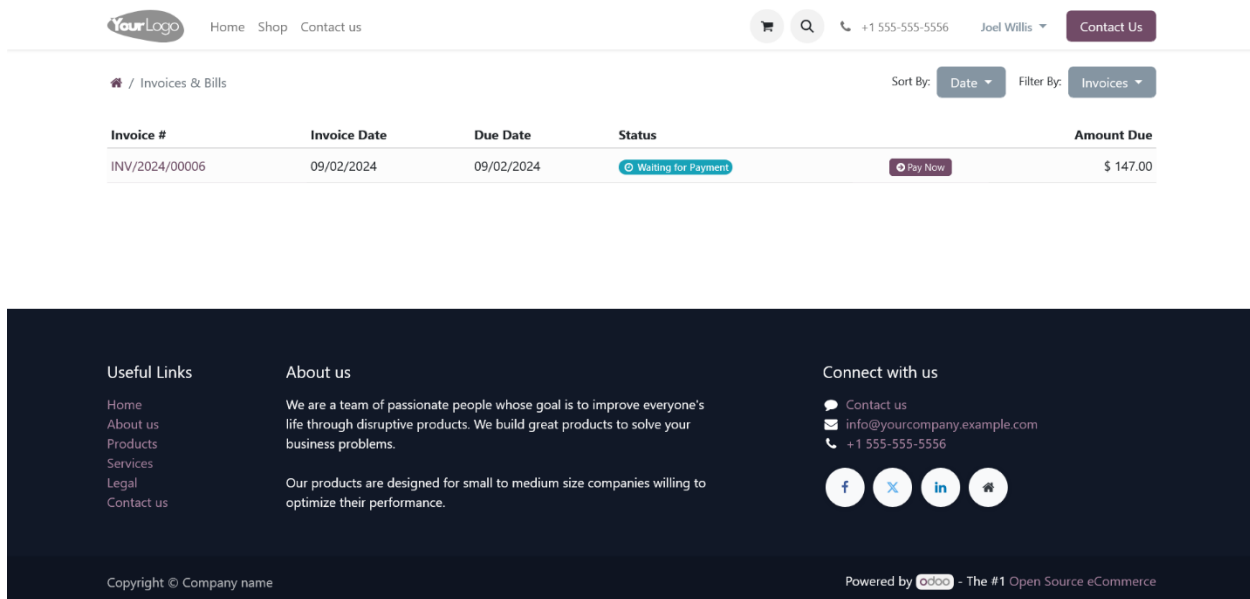


Screenshot 18: Invoices List

Click the 'Pay Now' button to proceed with the payment.

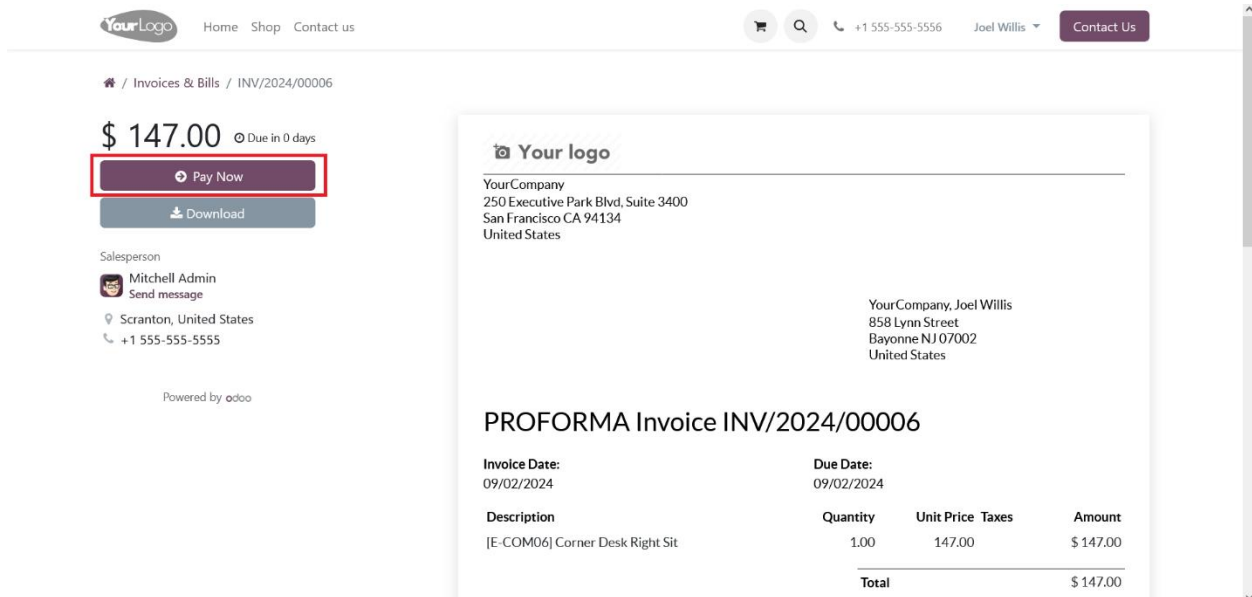


Screenshot 19: Invoices Payment Process

Select your preferred payment method to proceed with the payment, and then click the 'Pay' button to access the Wallee provider interface.

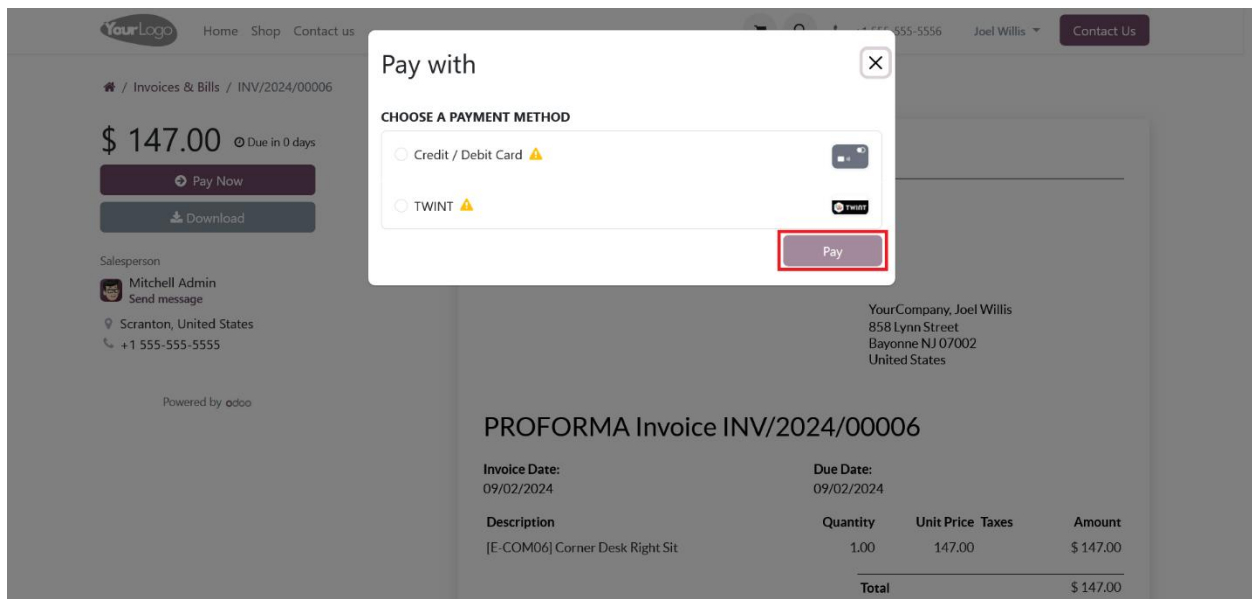


Screenshot 20: Payment Methods Listing

Based on the Wallee provider's payment page configuration in the back office, users will see either the Wallee IFrame or Lightbox payment interface.

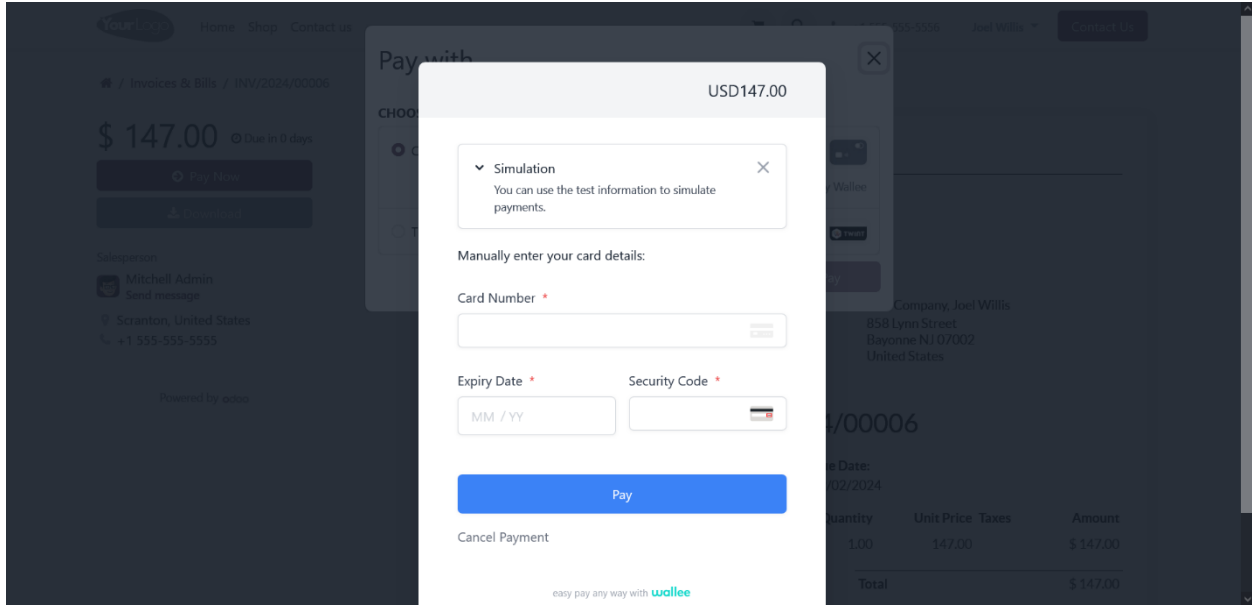


Screenshot 21: Wallee Payment Interface

Once the payment is successful, users will see the confirmation message below:

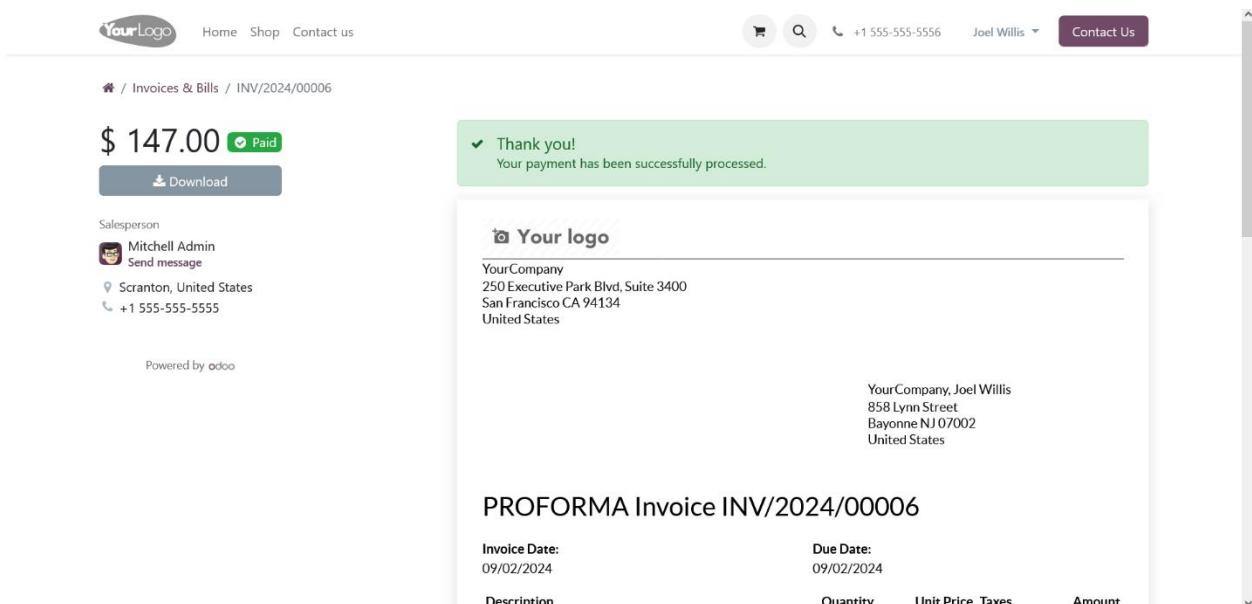


Screenshot 22: Payment Success Page

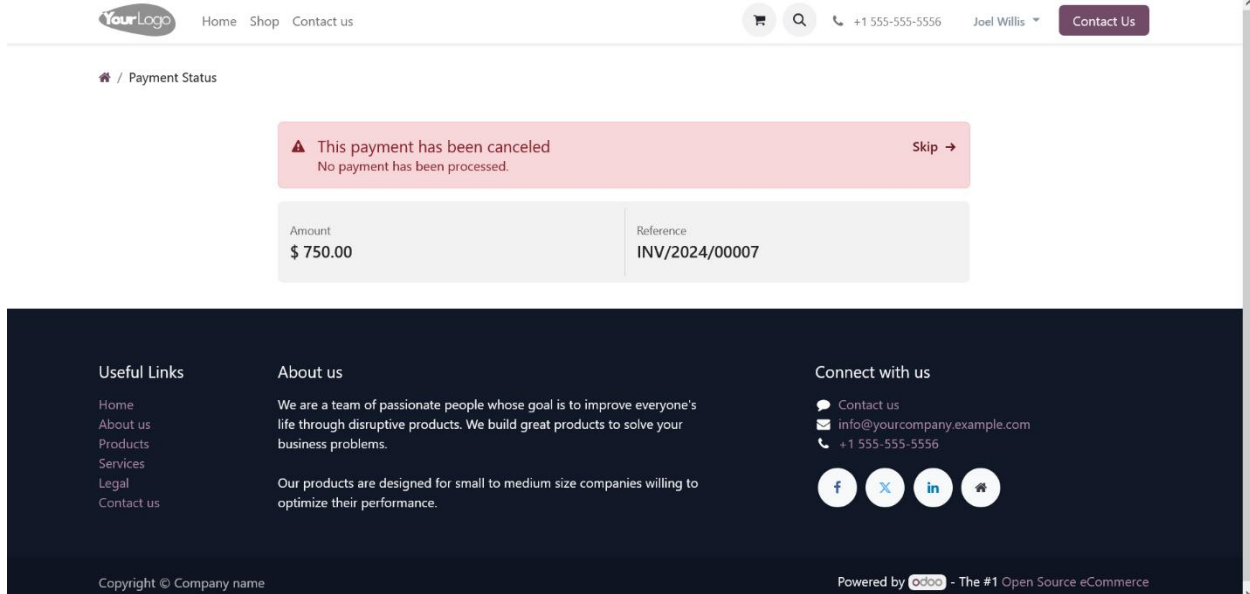


Screenshot 23: Payment Failed/Cancelled Page

Once you generate and confirm an invoice in the Odoo backend, a 'Preview' button will appear. Clicking this button will redirect you to the portal page, where you will find a 'Pay Now' button. Clicking the 'Pay Now' button will open the payment interface as explained earlier.

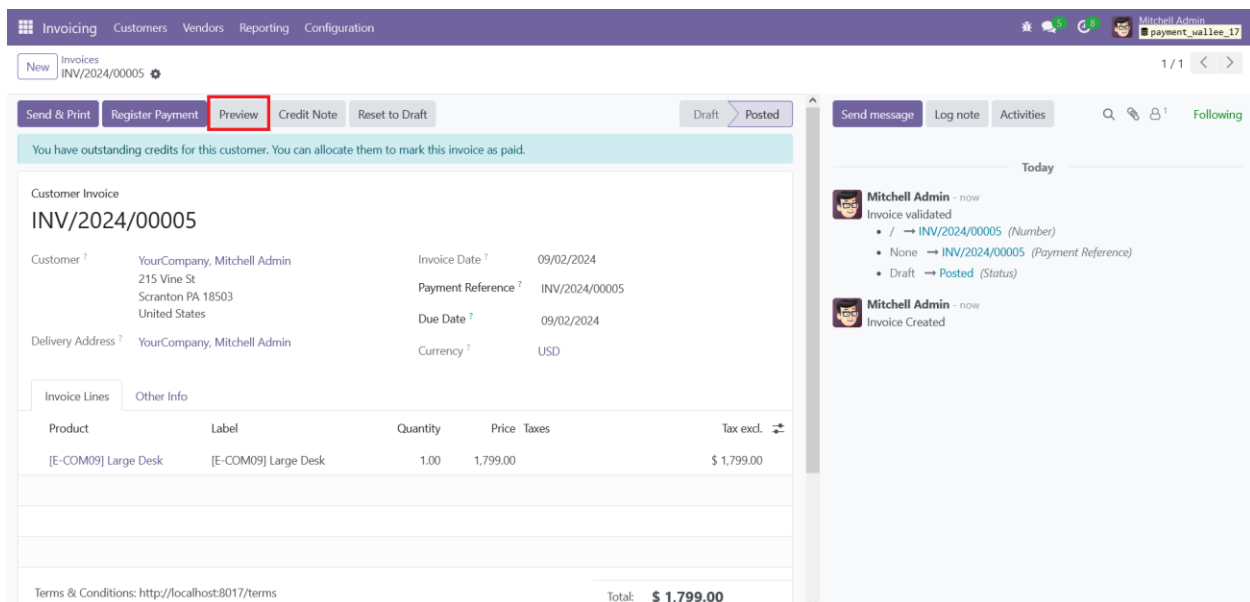

Screenshot 24: Invoice Payment Process from Odoo Backend

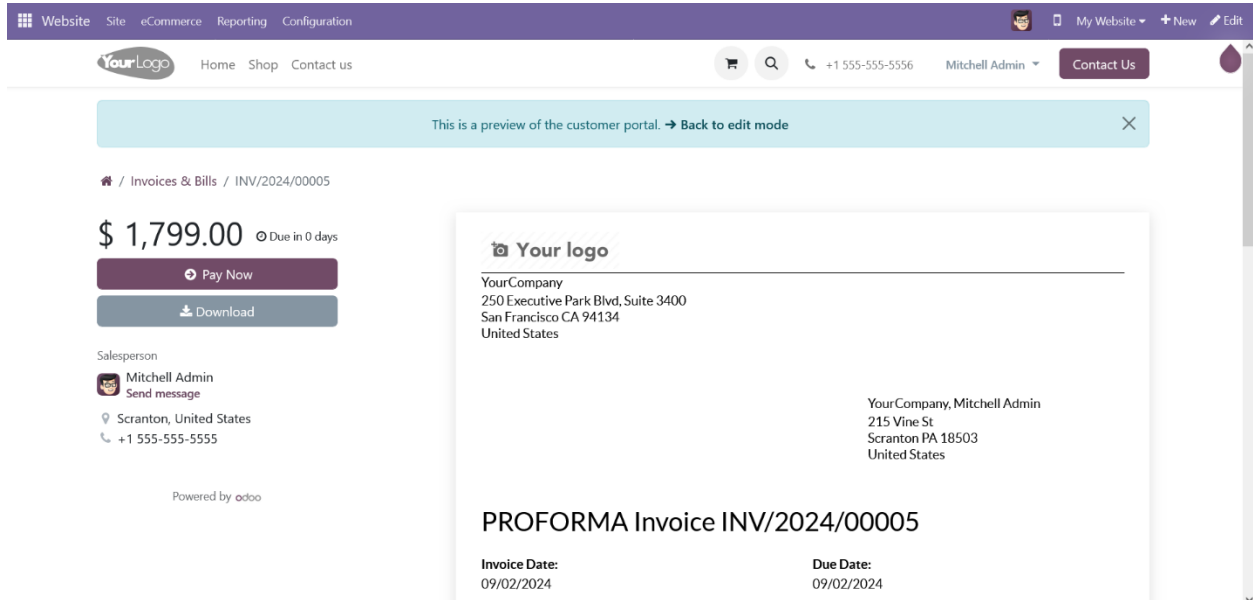

Screenshot 25: Invoice Payment Process Portal Page

5. Technical Requirements / Compatible With:

- Technical Requirements: Odoo Sales, Payment and Website Module.
- Compatible with ODOO community version 17.0.

6. Changes Log / Release Notes

Version 2.1.2: February 2025

- Refinement of payment transaction logging feature.

Version 1.1.2: January 2025

- Bug Fixes and improvements.

Version 1.1.1: August 2024

- Added multi-website compatibility.

Version 1.0.0: April 2023

- Initial release.



7. Support

If you have questions, use our contact form at [webshopextension.com](https://www.webshopextension.com) or email at support@webshopextension.com.